

9340 TTV

336 HP



DEMO YOUR
DEUTZ





Learn more at
deutz-fahramerica.com



9340 TTV

336 Horsepower

*MaxiVision Cab 2 with
12.8" Monitor 2.0*

47,000 Lumen Working Light

26,450 lb Rear Lift Capacity

9340 TTV

ENGINE

Deutz
336 HP (Gross)
6 cyl. / 7.8 L

TRANSMISSION


4-Range CVT
Reverse Power Shuttle

HYDRAULICS

55 GPM Pump Output (std)
4 Auxiliary hydraulic distributors

LIFT CAPACITY

Front Lift Capacity: 11,000 lb
Rear Lift Capacity: 26,450 lb
3-pt. Lift Capacity

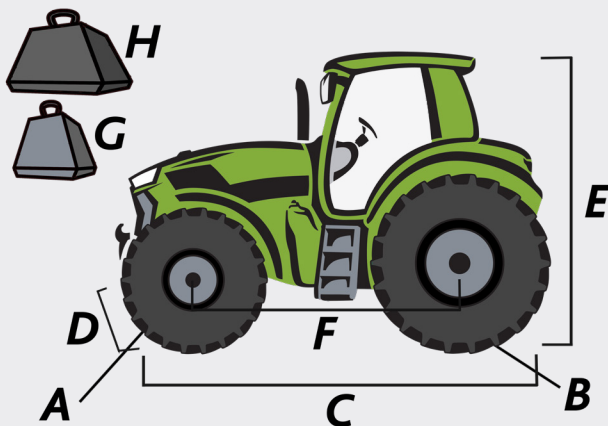

9340 TTV

SPECIFICATIONS

	TTV
A Standard Front Tires	650/65 R34
B Standard Rear Tires	900/60 R42
C Length (in)	207
D Width (in)	100-108
E Height (in)	138
F Wheelbase (in)	123
G Base Weight (lb)	26,450
H Max. Weight (lb)	39,675

9 SERIES TTV Agrottron

9340

Technical data

Description	Item	
ENGINE		
Manufacturer		Deutz
Model		TTCD 7.8 L06
Emissions		Tier4 final
Cylinders/Capacity	No./liters	6 / 7.775
Double-Turbo		•
Electronic-viscstatic fan		•
Deutz Common Rail (DCR)	PSI/bar	29,000 / 2000
Max. power (ECE R120)	hp/kW	336/247
Power at rated engine speed (ECE R 120)	hp/kW	316/232
Engine speed at maximum power	rpm	1900
Rated engine speed	rpm	2100
Max. torque	lb-ft/Nm	1,011/1372
Engine speed at maximum torque	rpm	1500
Electronic engine governor		•
Air filter with dust ejector		•
Fuel tank capacity	gal/liters	158/600
DEF (AdBlue®) tank capacity	gal/liters	14.555
TTV TRANSMISSION		
Model		ZF Terramatic TMT 32
Max. speed	mph/kph	25-31-37/40-50-60
Overspeed (60 kph Eco)		•(1780 rpm)
Overspeed (50 kph Eco)		•(1480 rpm)
Overspeed (40 kph SuperEco)		•(1300 rpm)
PowerZero		•
CruiseSpeed	No.	2 forward + 2 reverse
Driving Strategies (Auto/Manual/PTO)		•
Eco/Power control		•
Reverse power shuttle		•
SenseClutch		•
PTO		
PTO 540E/1000/1000E		•
Front PTO 1000		○
Front PTO 1000E		○
AXLES AND BRAKES		
Suspended front axle		•
Electronically engaged 4-wheel drive		•
100 % front/rear differential lock		•
ASM system		•
Braking system with automatic 4-wheel drive engagement		•
External disc brakes		○
Powerbrake		•
Electric Parking Brake (EPB)		•
HYDRAULIC SYSTEM AND HITCH		
Pump output (std)	gpm/lpm	42/160
Pump output (opt)	gpm/lpm	55/210
Closed centre hydraulic system (Load Sensing)		•
Max. usable oil volume	gal/liters	26/100
Separate additional oil tank		•
Auxiliary hydraulic distributors (std)	No. of valves	4
Auxiliary hydraulic distributors (opt)	No. of valves	5/6/7/8
Rear hitch electronic		•
Rear lift capacity	lb/kg	26,450/12000
Front hitch		•
Front lifting capacity	lb/kg	11,000/5000
ELECTRICAL SYSTEM		
Voltage	V	12
Standard battery	V/Ah/A	12/180/700
Alternator	V/A	12/2x200

Technical data		9 SERIES TTV Agrottron	
		9340	
Starter motor	V/kW	12/4.0	
External power socket		●	
CAB			
MaxiVision Cab 2		●	
Pneumatic suspension		●	
Adjustable rear view mirrors		●	
Heated adjustable rear view mirrors		○	
Air conditioning		●	
Automatic A/C system		○	
High visibility roof		●	
MaxCom multifunction armrest		●	
Multifunction joystick		●	
WorkMonitor		●	
Light control panel		●	
iMonitor 2.0		○	
Agrosky ready		○	
ISOBUS compatibility		○	
Comfortip Professional		○	
Max Comfort Dynamic Seat XL ++ (dynamic low frequency suspension)		●	
Max Comfort Dynamic Seat XXL ++ (dynamic suspension, low frequency horizontal suspension)		○	
Upholstered instructor's seat		●	
Wiring for audio system with speakers		●	
Halogen work lights		●	
Full-LED work lights		○	
Xenon work lights		○	
HITCHES			
Automatic towing hitch		●	
Height adjustable ball hitch		○	
Fixed ball automatic hitch		○	
Upper link		○	
Hydraulic upper link		○	
Pickup hitch		○	
Piton Fix		○	
DIMENSIONS AND WEIGHTS			
With front tires		650/65R34	
With rear tires		710/75R42	
Wheelbase	in/mm	123/3135	
Length	in/mm	207/5268	
Height	in/mm	138/3500	
Width	in/mm	100-108/2550 - 2750	
Ground clearance	in/mm	16-17/410 - 440	
Front unladen weight	lb/kg	10,675/4850	
Rear unladen weight	lb/kg	15,750/7150	
Total unladen weight	lb/kg	26,450/12000	
Max. permissible front weight	lb/kg	16,525/7500	
Max. permissible rear weight	lb/kg	26,450/12000	
Max. permissible total weight	lb/kg	39,675/18000	

Technical data and pictures are manufacturer's estimates. DEUTZ-FAHR reserves the right to update the specifications of its machines at any time without notice.

●: standard ○: optional -: not available